

OFFICE 300 INSTALLED

SKU: 479047 **MAP:** \$3799.99

FEATURES

- Best-in-class complete system for small-to-medium businesses and warehouses.
- Covers up to 15,000 square feet.
- Includes professional custom installation anywhere in the US.
- Comes with 2 inside antennas for more complete coverage.
- Outside omni-directional antenna with higher gain and range.
- FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular, and more.



KIT INCLUDES



Professional Installation



Office 300 Amplifier & Power Supply (850026)





2+ Low Profile Antennas (314407) & 2+ N Male - F Female Connectors (971128)



2-Way Splitter (850034)

ABOUT

Resolve cell signal issues with a quick, turnkey solution that includes complete, professional installation. **Office 300 Installed** is our best-in-class solution, designed for small-to-medium businesses and warehouses. It comes with two low-profile antennas for optimal cell signal coverage throughout a commercial space. Also included, is a new outside omni directional antenna that has higher gain and better range which will efficiently receive the best possible signal. Office 300 Installed is 5G compatible and improves cell signal on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular and others. Office 300 Installed also comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.

SPECIFICATIONS


SKU NUMBER	479047 †	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	72 dB	
IMPEDANCE	75 Ohm	
POWER	110-240V AC, 50-60 Hz, 20 W	
CONNECTORS	F-Female	
BOOSTER DIMENSIONS	14.25 × 10.75 × 2.25 in	
BOOSTER WEIGHT	7.7 lbs	

^{*}New 25" outside omni directonal antenna - 9dBi Peak Gain

[†] **WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

we:boost

HOW IT WORKS

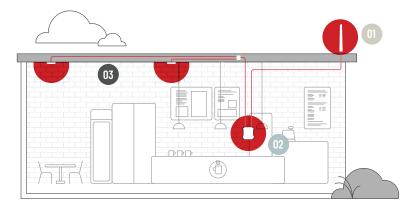

- Outside antenna: The outside antenna communicates back and forth with nearby cell towers.
- **Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- **Inside antennas:** The inside antennas broadcasts these signals for use throughout your business.

PACKAGE DIMENSIONS (APPROX.)

30 L x 15.25 W x 11.75 H



30 in. 11.75in.

30 in. 15.25 in.



FRONT

SIDE

TOP/BOTTOM

WEIGHT

MASTER CARTON: 30 L x 15.25 W x 11.75 H | 16.34 Lbs. | Qty 1

FOR PARTNER'S USE

SUPPORT



3-Year Warranty from Purchase.

Website: http://support.weboost.com

Phone: +1 866 294 1660 Monday to Saturday





UPC



479047_Office300_Installed_SS_07.22.24